



Top View

Cast Iron Frame & Cover

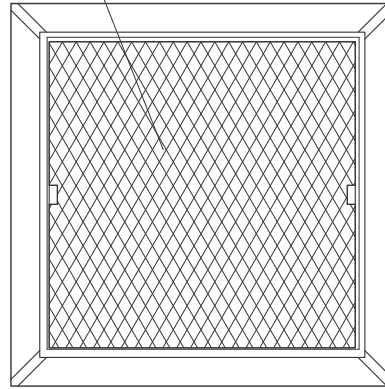

# Outlets	A	B	C	D	E
6	26"	17"	18"	4"	4"
9	34"	24"	26"	3.5"	6"
12	41"	28"	18"	4"	6"

1' Risers available

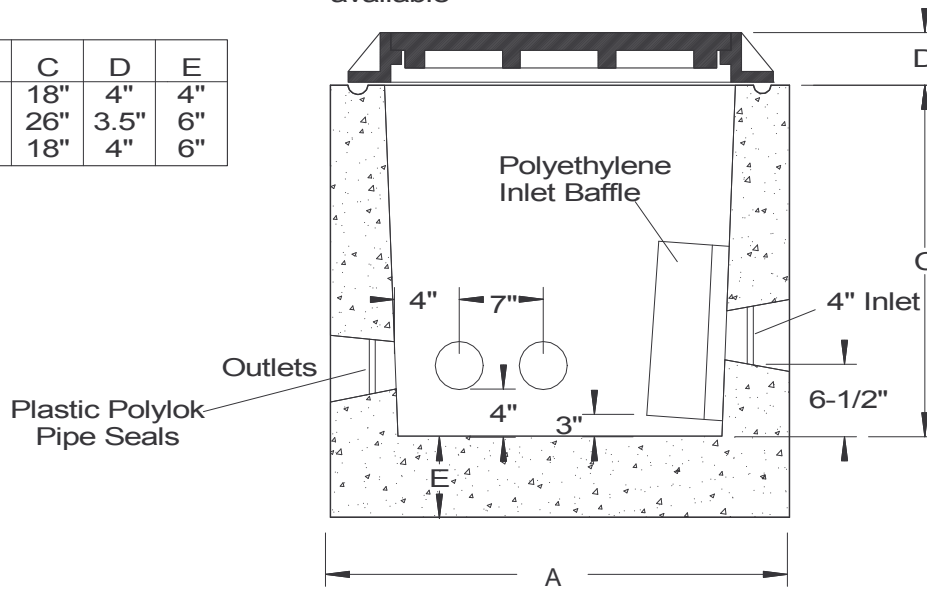

Side View

SPECIFICATIONS

Concrete Min. Strength: 4,000 psi at 28 days
 Reinforcement: #4 Rebar / ASTM A615
 Air Entrainment: 6%
 Pipe Connection: Polylok Seal
 Weights: 650 lb / 1,300 lb / 2,000 lb
 Load Rating: H20-44 + 30% / ASTM C857

PRECAST TRAFFIC RATED DISTRIBUTION BOXES

Woodard's Concrete Products, Inc.
 629 Lybolt Road, Bullville, NY 10915
 (845) 361-3471 / Fax 361-1050

5/18/12