
Top View

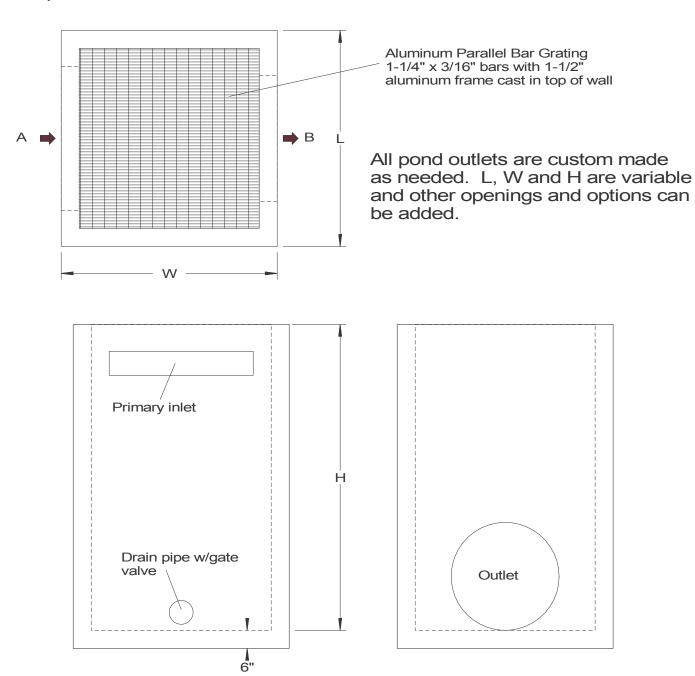

SPECIFICATIONS

Concrete Min. Strength: 4,000 psi at 28 days

Reinforcement: #4 Bar / ASTM A615

Air Entrainment: 5%

Side A

Construction Joint: Butyl Rubber Sealant

Pipe Connection: mortar

Weight = varies

Load Rating: 300 psf

PRECAST POND OUTLET

Woodard's Concrete Products, Inc. 629 Lybolt Road, Bullville, NY 10915 (845) 361-3471 / Fax 361-1050

7/17/06

Side B