


Top View

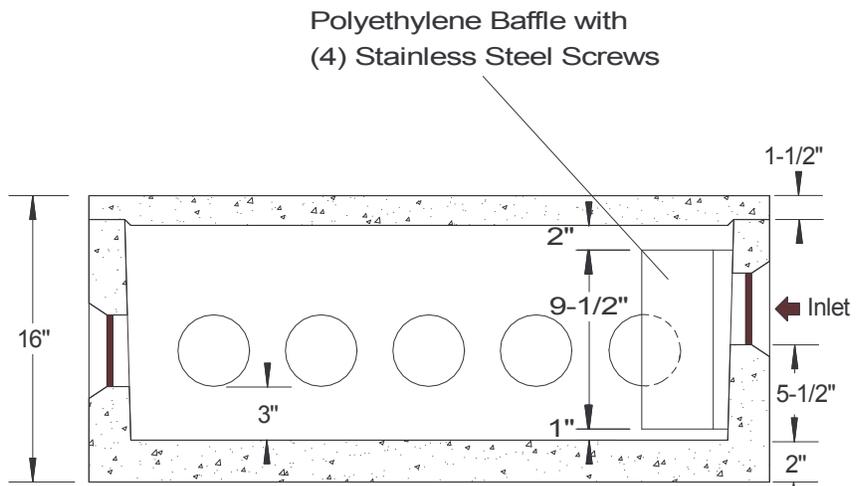

Side View

Polyethylene Baffle with  
(4) Stainless Steel Screws

SPECIFICATIONS	
<p>Concrete Min. Strength: 4,000 psi at 28 days            Reinforcement: Fiber, 10ga. wire mesh            Air Entrainment: 5%            Pipe Connection: Polylok Seal (patented)            Load Rating: 300 psf            Weight = 325 lbs</p>	<p style="text-align: center;"><b>PRECAST DISTRIBUTION BOXES</b>  <b>MODEL DB-12 / 12 OUTLETS W/BAFFLE</b></p> <p style="text-align: center;"><b>Woodard's Concrete Products, Inc.</b>            629 Lybolt Road, Bullville, NY 10915            (845) 361-3471 / Fax 361-1050</p>