


Top View

↑
4" Inlet

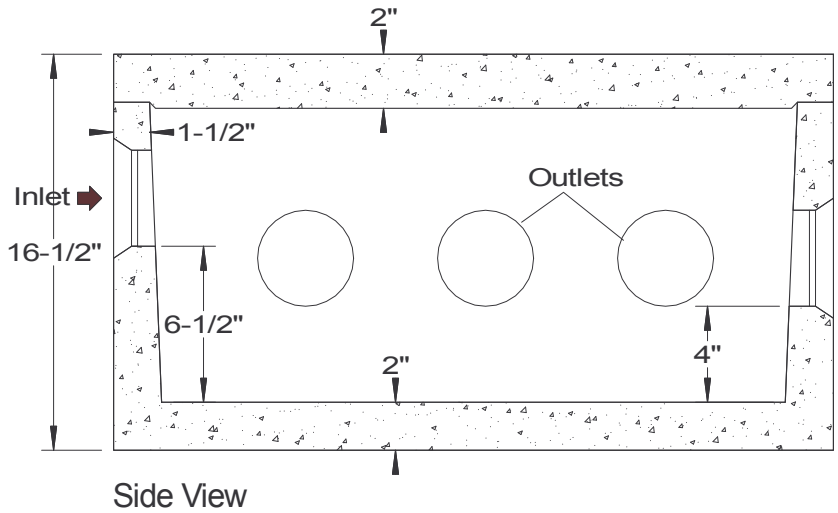

Side View

SPECIFICATIONS

Concrete Min. Strength: 4,000 psi at 28 days
 Reinforcement: Fiber, 10ga. wire mesh
 Air Entrainment: 5%
 Pipe Connection: Polylok Seal (patented)
 Load Rating: 300 psf
 Weight = 290 lbs

PRECAST DISTRIBUTION BOXES MODEL DB-9 / 8 OUTLET BOX

Woodard's Concrete Products, Inc.

629 Lybolt Road, Bullville, NY 10915
 (845) 361-3471 / Fax 361-1050

Page 5B 1/12/05