

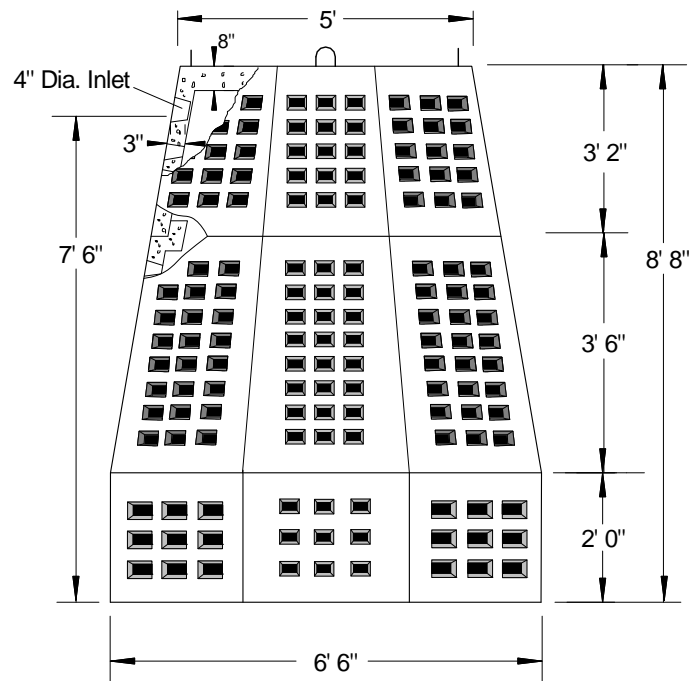


Drain Hole Detail



Side View

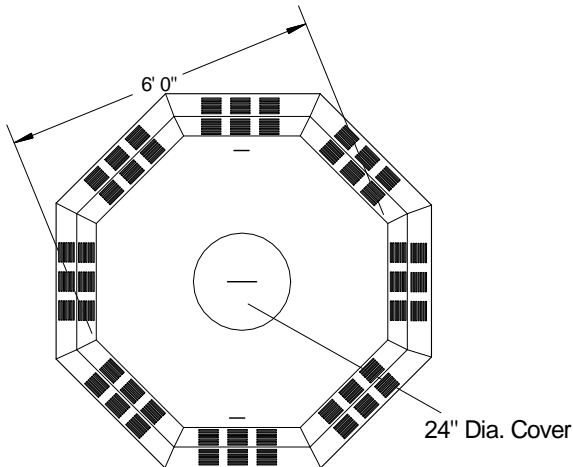

Top View

SPECIFICATIONS	
<p>Concrete Min. Strength: 4,000 psi at 28 days Reinforcement: #4 & 5 Rebar / ASTM A615 Air Entrainment: 5% Capacity = 1,300 gallons Weight = 6,700 lbs Sidewall Area = 136 square feet Load Rating: H20 / ASTM C857</p>	<p>PRECAST DRY WELLS MODEL DW-8.5 H20 / 1300 GALLONS</p> <hr/> <p>Woodard's Concrete Products, Inc. 629 Lybolt Road, Bullville, NY 10915 (845) 361-3471 / Fax 361-1050</p> <p style="text-align: center;">2/10/04</p>