
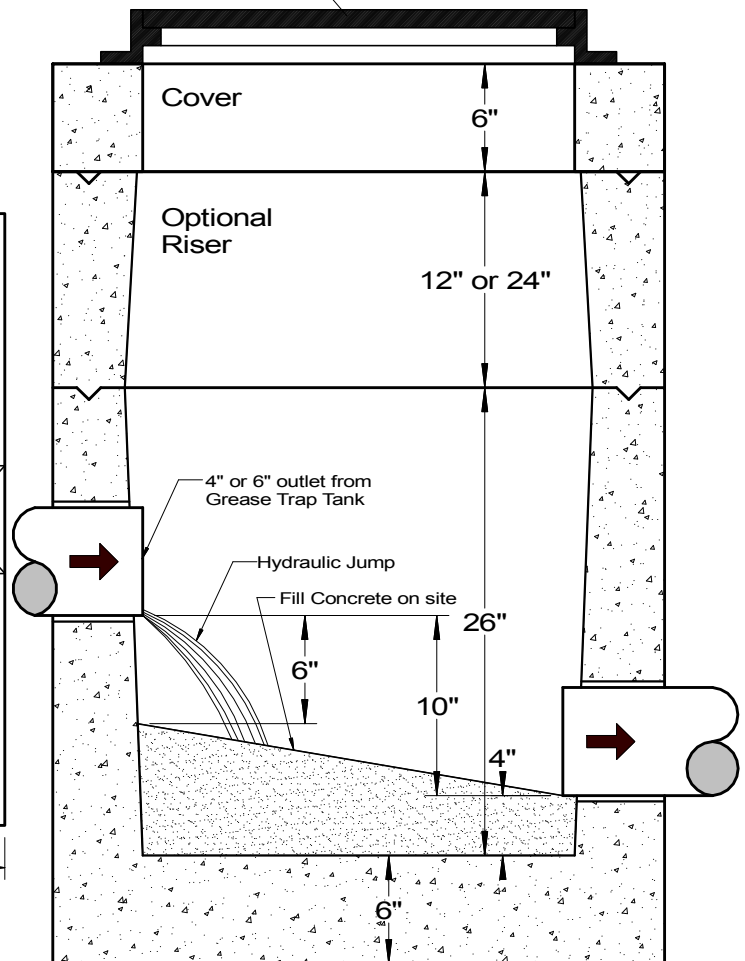


The NYSDEC recommends using Sample Vaults after all commercial Grease Traps.

Sample Vault

24" Cast Iron bolted Cover
LD 3" tall or HD 4" tall

Top View

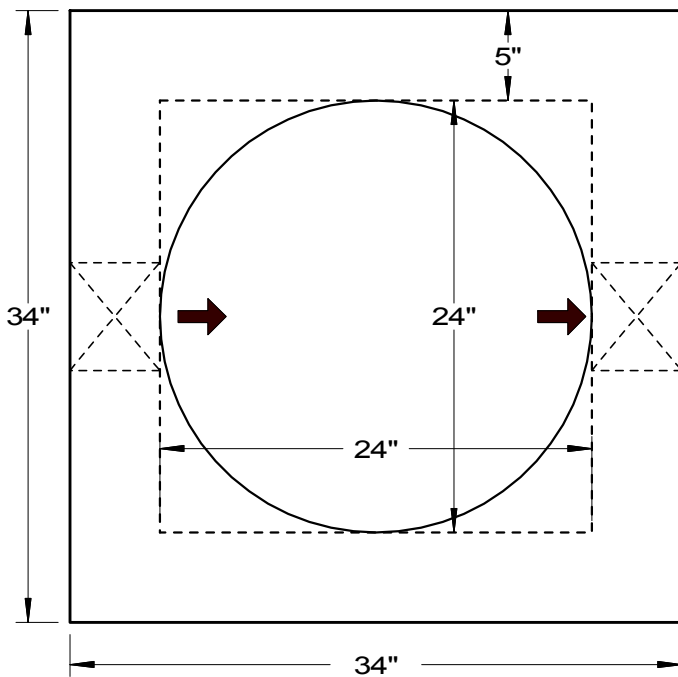

Side View

SPECIFICATIONS

Concrete Min. Strength: 4,000 psi at 28 days
 Reinforcement: #4 bar / ASTM A615
 Air Entrainment: 6%
 Construction Joint: Butyl Rubber Sealant
 Pipe Connection: mortar
 Weight = 2,200 lbs
 Load Rating: HS20-44 / ASTM C857

PRECAST OUTLET SAMPLE VAULT FOR COMMERCIAL GREASE TRAPS

Woodard's Concrete Products, Inc.
 629 Lybolt Road, Bullville, NY 10915
 (845) 361-3471 / Fax 361-1050

3/5/13