


Model	S-400	S-600
Gallons/Day	400	600
Tank Cap.	1,500 gal.	2,000 gal.
Length A	126"	144"
Width B	68"	78"
Length C	37"	43"
Inlet Inv. D	55"	56"
Tank Ht. E	65"	68"

The Sludgehammer System:
 -S-400 & S-600 systems are NSF-40 Certified for Advanced Aerobic Treatment

-System Packages Include:
 Sludgehammer Unit w/Bacterial Catalyst
 Fittings & lift rope
 Matrix Float & Curtain
 Effluent Outlet Filter
 S-600 adds extra Aerator & larger Float Matrix

System Maintenance:
 -All aerobic systems installed in NYS require a maintenance contract
 -Yearly inspection would include replacing the bacterial catalyst and checking the outlet filter, air pump and matrix units.

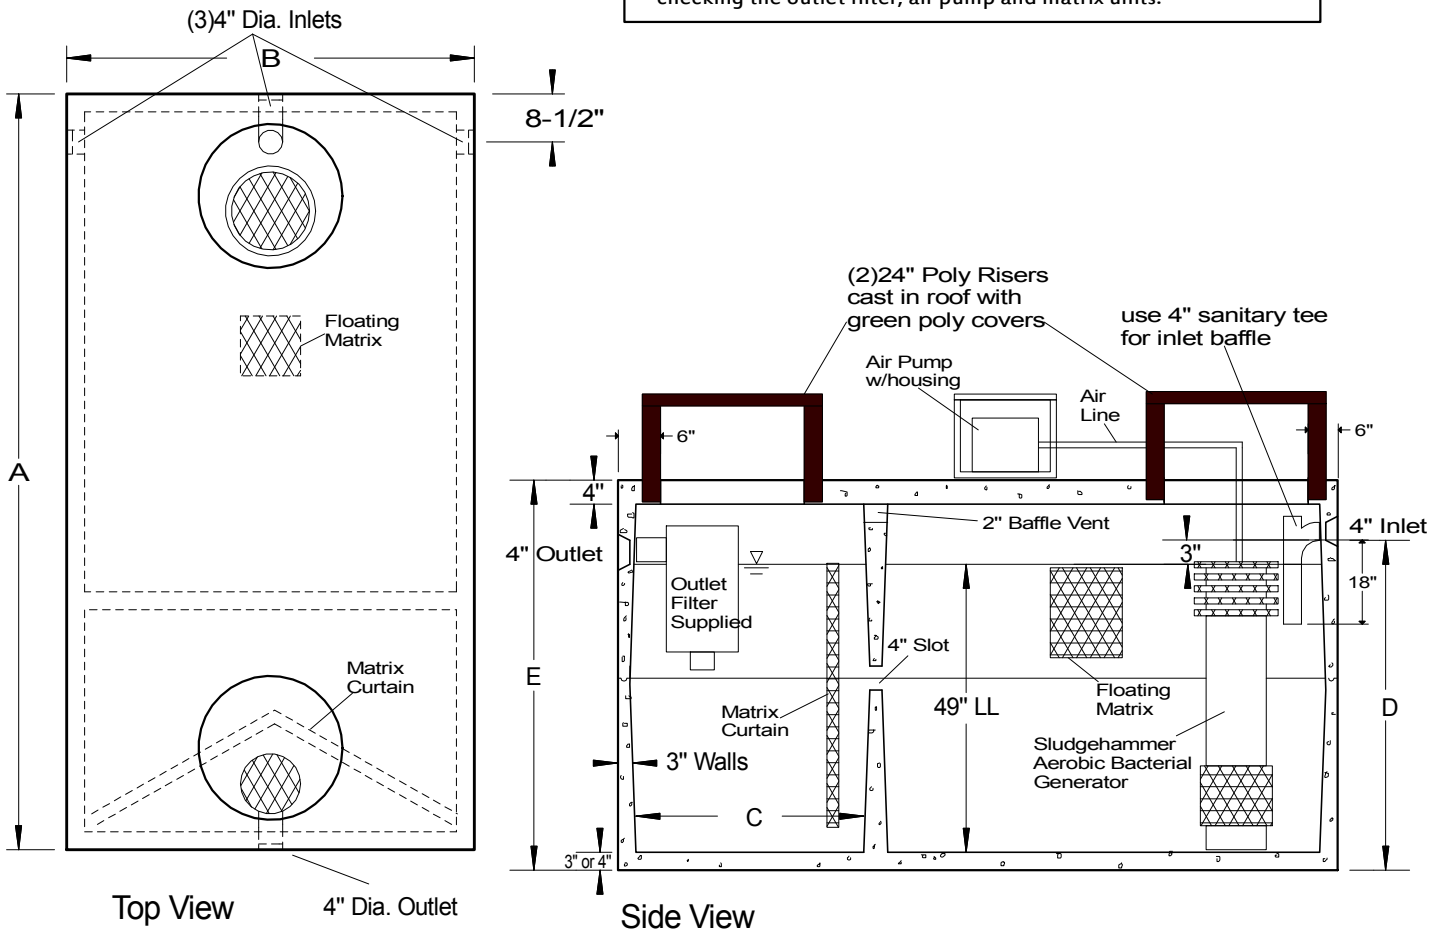

SPECIFICATIONS	
Concrete Min. Strength: 4,000 psi at 28 days Reinforcement: 6x6x10ga. WWM, #4 bar Air Entrainment: 6% Construction Joint: Butyl Rubber Sealant Pipe Connection: Polylok Seal (patented) Load Rating: 300 psf	PRECAST AEROBIC SEPTIC TANKS SLUDGEHAMMER S-400 & S-600 Woodard's Concrete Products, Inc. 629 Lybolt Road, Bullville, NY 10915 (845) 361-3471 / Fax 361-1050 Page 2A 1/7/15