


Inlet note: Use a sanitary tee with pipe extension to meet the NYSDOH requirement for baffle 16" below liquid level.

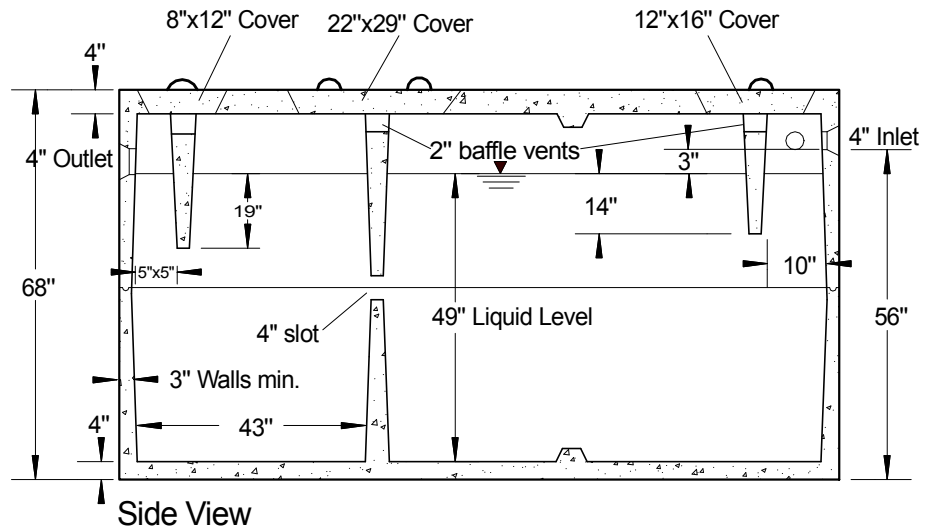

SPECIFICATIONS	
<p>Concrete Min. Strength: 4,000 psi at 28 days            Reinforcement: #4 Rebar gr.60, 6x6x10ga. WWM            Air Entrainment: 6%            Construction Joint: Butyl Rubber Sealant            Pipe Connection: Polylok Seal (patented)            Weight = 15,500 lbs            Load Rating: 300 psf</p>	<p><b>PRECAST SEPTIC TANKS</b>  <b>MODEL ST-2000 / 2000 GALLONS</b></p> <p><b>Woodard's Concrete Products, Inc.</b>            629 Lybolt Road, Bullville, NY 10915            (845) 361-3471 / Fax 361-1050</p> <p>Page 5A 7/18/14</p>