



COVERS					
DIA.	SOLID	MANHOLE	MAN. SIZE	THICKNESS	WEIGHT
19"	DBR-4L			2"	45 lbs
30"	CS-30			2"	115
36"	CS-36			4"	327
42"	CS-42	CM-42	20" dia.	4"	436
54"	CS-54	CM-54	20" dia.	4"	691
60"	CS-60	CM-60	20" dia.	4"	872
78"		CM-78	20" dia.	4"	1600
96"		*CM-96	24" dia.	8"	4712
120"		*CM-120	24" dia.	10"	8844

WELL TILE			
HEIGHT	30"ID 36"OD	36"ID 42"OD	48"ID 54"OD
1' High	WT-30X1	WT-36X1	
2' High	WT-30X2	WT-36X2	WT-48X2
4' High		WT-36X4	WT-48X4
4' h w/bottom		WT-36X4WB	WT-48X4WB
Weight/foot	290 lbs	345 lbs	450 lbs

Green Plastic Covers to fit 15", 18" or 24" Culvert Pipe

RISERS				
CAT. #	A	B	C	Weight
R-12	15"	19"	12"	100 lbs
R-15	15"	19"	15"	125
R-18	15"	19"	18"	150
*R-24X6	24"	36"	6"	280
*R-24X12	24"	36"	12"	560
*R-24X24	24"	36"	24"	1120

*H20 load rated for truck traffic

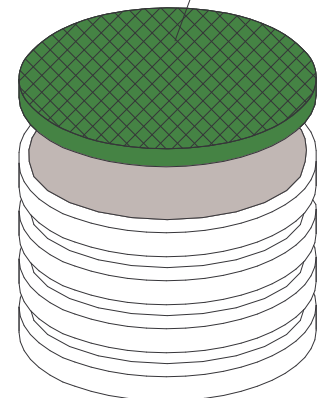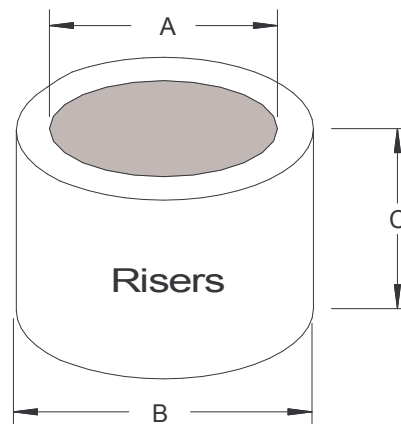

Risers available in 1' increments

SPECIFICATIONS	PRECAST WELL TILE, COVERS & RISERS
Concrete Min. Strength: 4,000 psi at 28 days Reinforcement: Fiber, 6x6 WWM, Rebar Air Entrainment: 6% Pipe Connection: Polylok Seal (patented) Load Rating: 300 psf unless noted above	Woodard's Concrete Products, Inc. 629 Lybolt Road, Bullville, NY 10915 (845) 361-3471 / Fax 361-1050 Page 10B 5/18/12