



Plan View

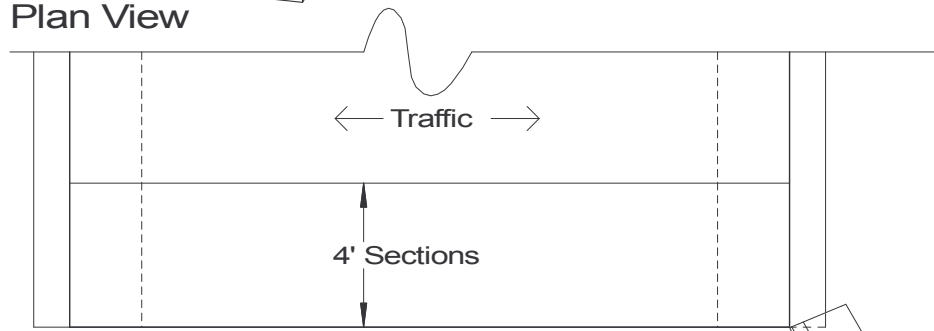

Span (ft)	Walls (in)	Roof (in)
6 to 10	8	10
12 to 16	12	12

Side Elevation

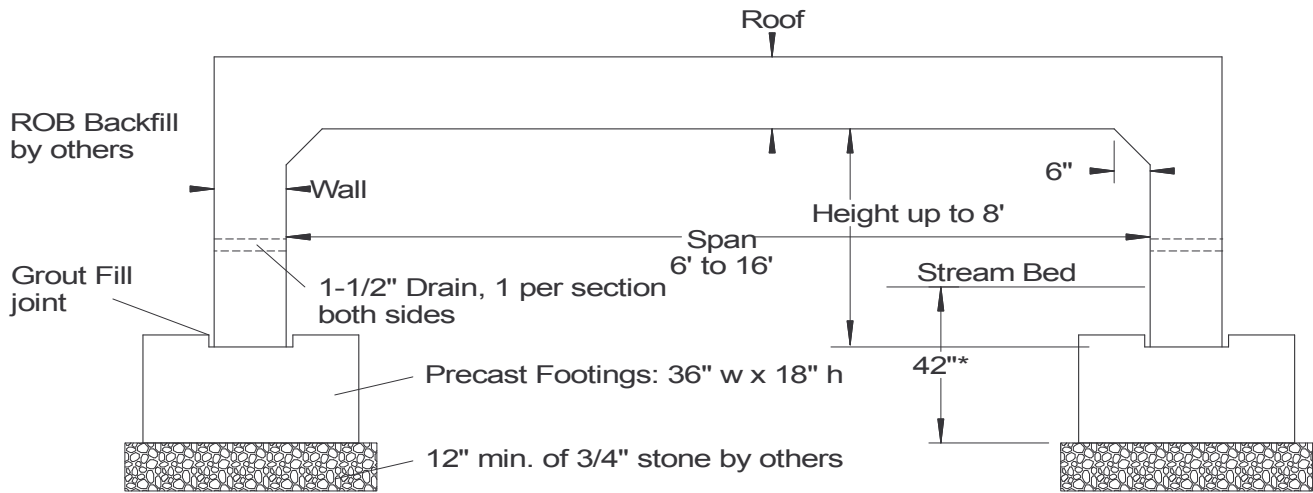

\*Footing depth can vary due to site conditions.

SPECIFICATIONS	
Concrete Min. Strength: 5,000 psi at 28 days Reinforcement: #3 to #6 Bar / ASTM A615 Air Entrainment: 5% Lifting: (4) 4 ton anchors Earth Cover: 0 to 2' Load Rating: H25 + 30% impact	<p align="center"><b>PRECAST BRIDGES</b> <b>6' TO 16' SPANS</b></p> <p align="center"><b>Woodard's Concrete Products, Inc.</b>            629 Lybolt Road, Bullville, NY 10915            (845) 361-3471 / Fax 361-1050</p> <p align="center">Page 1K 11/10/11</p>