
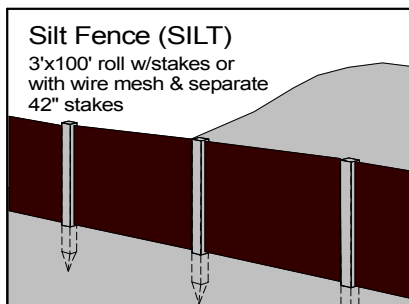
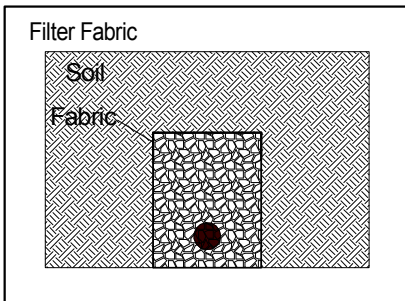


Specifications:

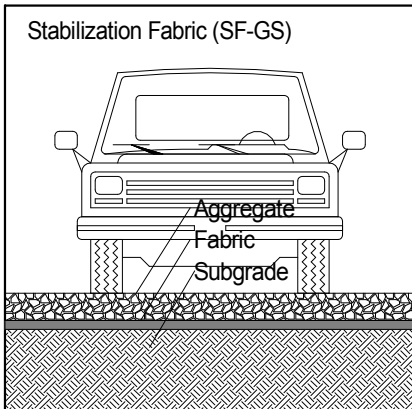

Fabric Use	Road Stabilization	Filter	Filter	Silt Fence	SF w/wire
Fabric Type	Woven	Non-Woven	Non-Woven	Woven	Woven
Inventory #	SF-GS	FF-2x360 or FF-3x360	FF-12.5x360	Silt	Silt-wm
Manufacturer #	FX-55	TS-35NS	FX-40HS	14987	1776
Width (ft)	12.5'	2' or 3'	12.5'	3'	3'
Length (ft)	432'	360'	360'	100'	100'
Weight (oz/yd)	5.6	3.5	4	na	2.8
Thickness D-5199	na	na	60 mils	na	na
Grab Str D-4632	200 lbs	57 lbs	100 lbs	90 lbs	144 lbs
Elongation D-4632	15%	50%	50%	15%	49%
CBR Puncture D-6241	700 lbs	145 lbs	250 lbs	60 lbs	75 lbs
Burst Str D-3786				325 lbs	225 lbs
Tear Str. D-4533	75 lbs	29 lbs	45 lbs	75 lbs	62 lbs
AOS D-4751	40	50	70	50	30
Water Flow D-4491	5 gpm/sf	150	140	40	20
Permitivity D-4491	0.05	2.2	2.0	na	na
UV Resistance D-4355-84	70%	70%	70%	80%	90%

SPECIFICATIONS	GEOTEXTILES
See Chart on Right	<p>Woodard's Concrete Products, Inc. 629 Lybolt Road, Bullville, NY 10915 (845) 361-3471 / Fax 361-1050</p> <p style="text-align: center;">Page 5H 5/6/15</p>