
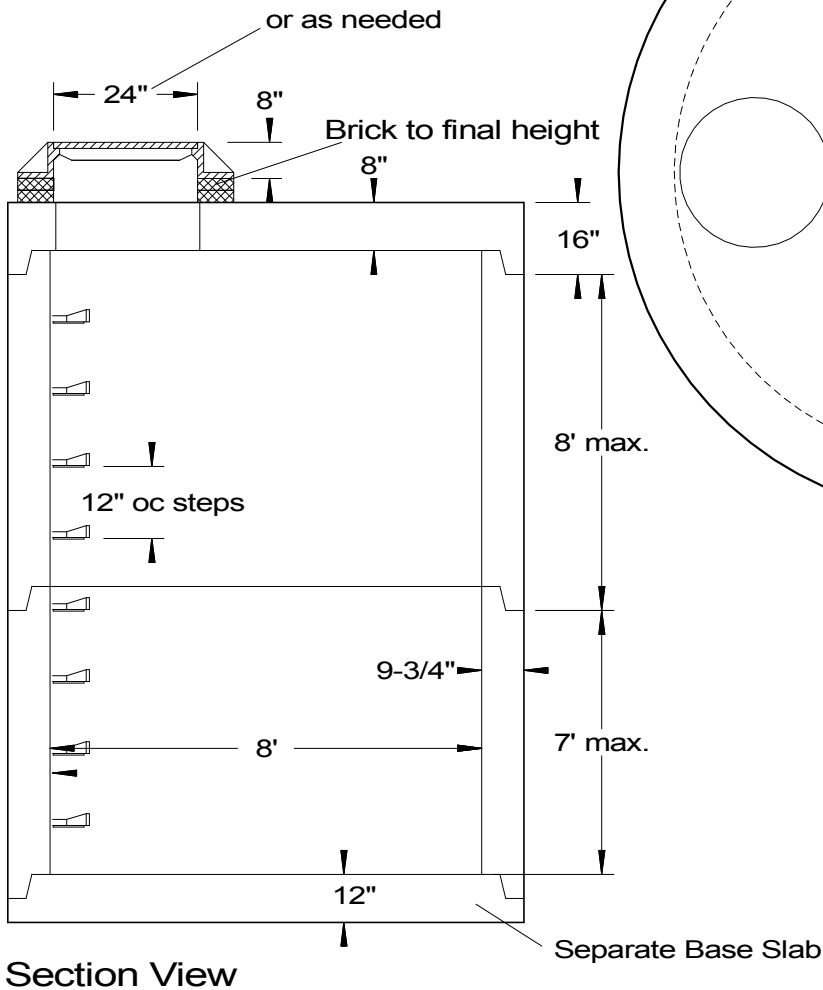


Plan View

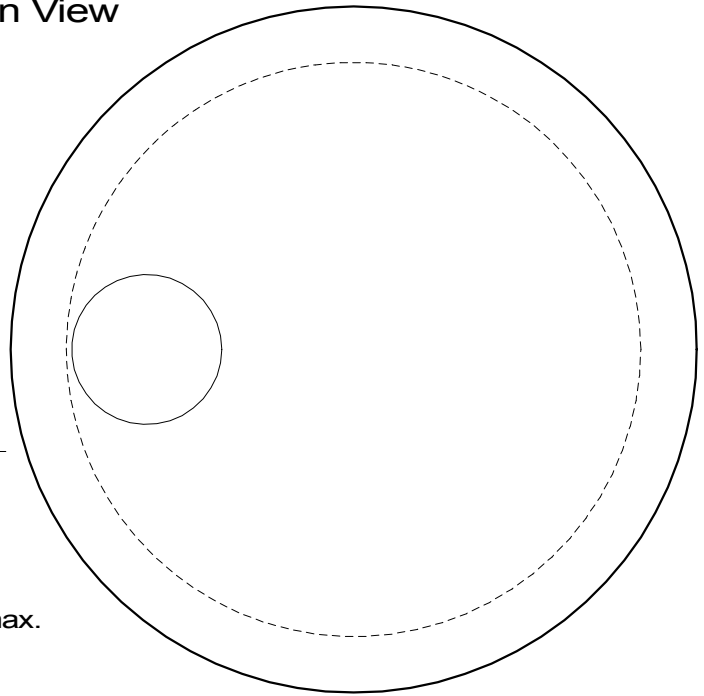

Section View

SPECIFICATIONS	
<p>Concrete Min. Strength: 4,000 psi at 28 days                      Reinforcement: ASTM C478                      Air Entrainment: 5%                      Construction Joint: Butyl Rubber Sealant                      Load Rating: HS20-44 / ASTM C857</p>	<p><b>PRECAST MANHOLES</b>  <b>96" ID BASE, RISER &amp; TOP</b></p> <p><b>Woodard's Concrete Products, Inc.</b>                      629 Lybolt Road, Bullville, NY 10915                      (845) 361-3471 / Fax 361-1050</p>