


# "Flout" Siphons

Made in the USA by:




Model #	313	317
Pipe Size (inches)	3	3
Single Siphon		
Draw (in.)	13	17
Dose (gallons)	280	367
Rate (gal/min)	72	72
Invert in to Invert out	21"	21"

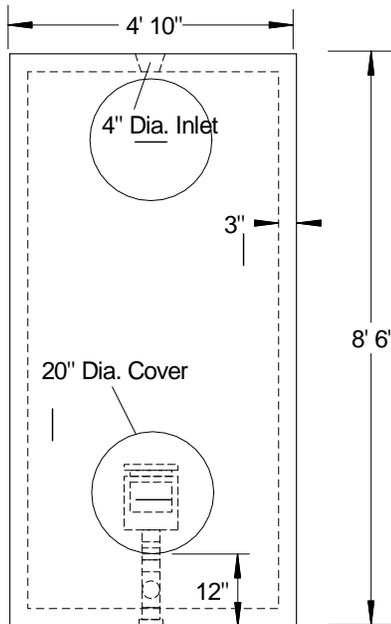

Top View

**Notes:**

1. We stock 13" & 17" draw siphons. They can be shortened down to 8" allowing a dose range of 173 to 367 gallons. Let us know your dose and we will set it up for you. For smaller doses, see our SC-4x3 chamber.
2. Dual alternating siphons are available with two weeks advance notice. They are set up as needed with a 15" draw.
3. Other dose volumes available on a special order basis.

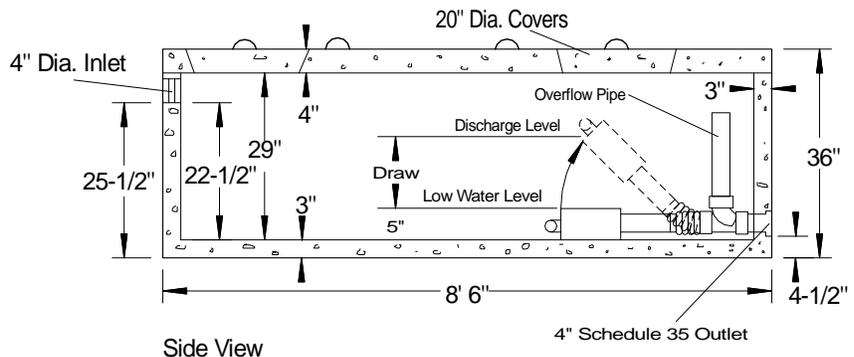

Side View

<b>SPECIFICATIONS</b>	
<p>Concrete Min. Strength: 4,000 psi at 28 days            Reinforcement: #4 Rebar, 6x6x10ga. WWM            Air Entrainment: 5%            Construction Joint: Butyl Rubber Sealant            Pipe Connection: Polylok Seal &amp; SDR 35 Coupler            Weight = 5,700 lbs            Load Rating: 300 psf</p>	<p style="text-align: center;"><b>PRECAST SIPHON CHAMBER            MODEL SC-5X9</b></p> <p style="text-align: center;"><b>Woodard's Concrete Products, Inc.</b>            629 Lybolt Road, Bullville, NY 10915            (845) 361-3471 / Fax 361-1050</p>
<p>Page 2C    7/11/03</p>	