



Brand	Model	Flow GPD	Slot Size	L. Feet Filtration	Pipe Size	H1/H2 (in)	*Alarm Ready	Used For
Polylok	PL-68	800	1/16"	68	3 or 4	16/22	N	Residential
	PL-122	1500	1/16"	122	4	12/18	Y	Res or Comm
	PL-525	10,000	1/16"	525	4 or 6	18/33	Y	Res or Comm
	PL-625	8,000	1/32"	625	4 or 6	18/33	Y	Grease Trap
Zabel	A1801	800	1/16"	80	4	18	Y	Residential
	A100-8x18-VC	1,200	1/16"	59.5	4 or 6	12.6/18.5	Y	Res / It Comm
	A100-8x26-VC	1,800	1/16"	89	4 or 6	19.6/25.5	Y	Res / It Comm
	A100-8x32-VC	2,400	1/16"	119	4 or 6	26.6/32.5	Y	Res / It Comm
	A100-12x20-VC	3,000	1/16"	138	4 or 6	13.3/19.8	Y	Res / It Comm
	A100-12x28-VC	4,500	1/16"	212	4 or 6	21.5/27.7	Y	Res / It Comm
	A100-12x36-VC	6,000	1/16"	277	4 or 6	29.2/35.5	Y	Res / It Comm
	A300-8x18-VC	1,200	1/32"	64	4 or 6	12.6/18.5	Y	It Com/Grease
	A300-8x26-VC	1,800	1/32"	94	4 or 6	19.6/25.5	Y	It Com/Grease
	A300-8x32-VC	2,400	1/32"	123	4 or 6	26.6/32.5	Y	It Com/Grease
	A300-12x20-VC	3,000	1/32"	146	4 or 6	13.3/19.8	Y	Grease/Kennel
	A300-12x28-VC	4,500	1/32"	220	4 or 6	21.5/27.7	Y	Grease/Kennel
	A300-12x36-VC	6,000	1/32"	285	4 or 6	29.2/35.5	Y	Grease/Kennel
	A600-8x18-VC	1,200	1/64"	64	4 or 6	12.6/18.5	Y	Fine Filtration
	A600-8x26-VC	1,800	1/64"	94	4 or 6	19.6/25.5	Y	Fine Filtration
	A600-8x32-VC	2,400	1/64"	123	4 or 6	26.6/32.5	Y	Fine Filtration
	A600-12x20-VC	3,000	1/64"	147	4 or 6	13.3/19.8	Y	Fine Filtration
	A600-12x28-VC	4,500	1/64"	220	4 or 6	21.5/27.7	Y	Fine Filtration
A600-12x36-VC	6,000	1/64"	293	4 or 6	29.2/35.5	Y	Fine Filtration	


Zabel A1801

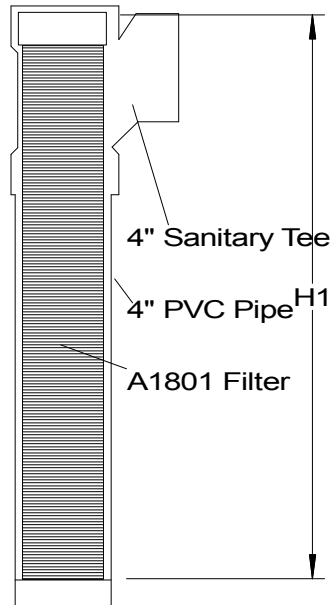

Polylok PL-122

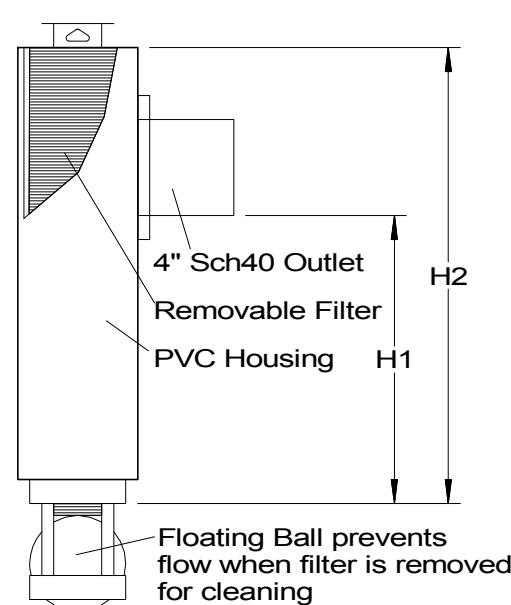

Zabel A100-600

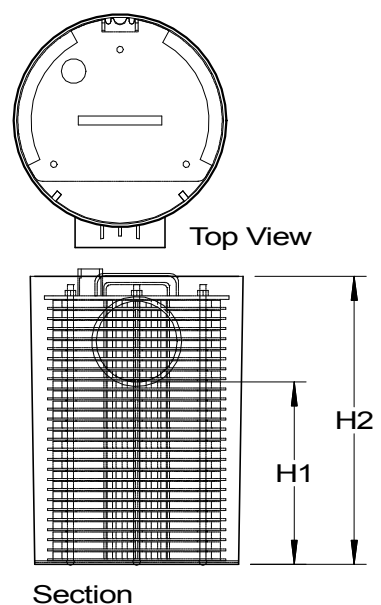

***See SmartFilter Alarm for details**

SPECIFICATIONS

Construction: PVC or Polyethylene plastic
NSF Standard 46 Certified

**SEPTIC TANK & GREASE TRAP
EFFLUENT FILTERS**

Woodard's Concrete Products, Inc.
629 Lybolt Road, Bullville, NY 10915
(845) 361-3471 / Fax 361-1050