




**Top View**

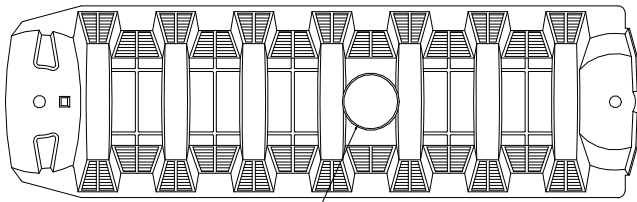

Inspection Port



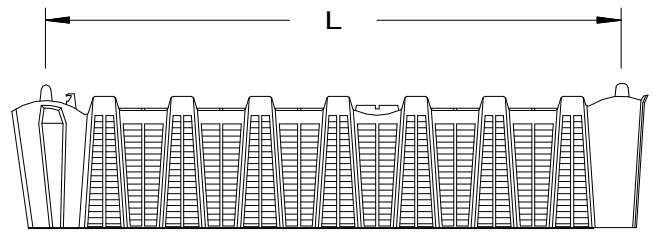


**Side View**



**End View**


**Multi-port End Cap**

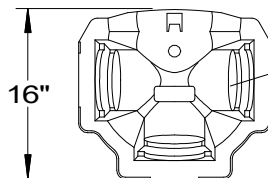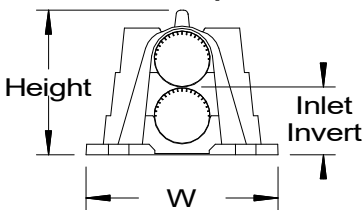

Inlets can take 3" or 4" schedule 35 pipe or 4" schedule 40 pipe.

**TYPICAL SINGLE CHAMBER INSTALLATION**

TRENCH DETAIL  
END VIEW  
(NOT TO SCALE)

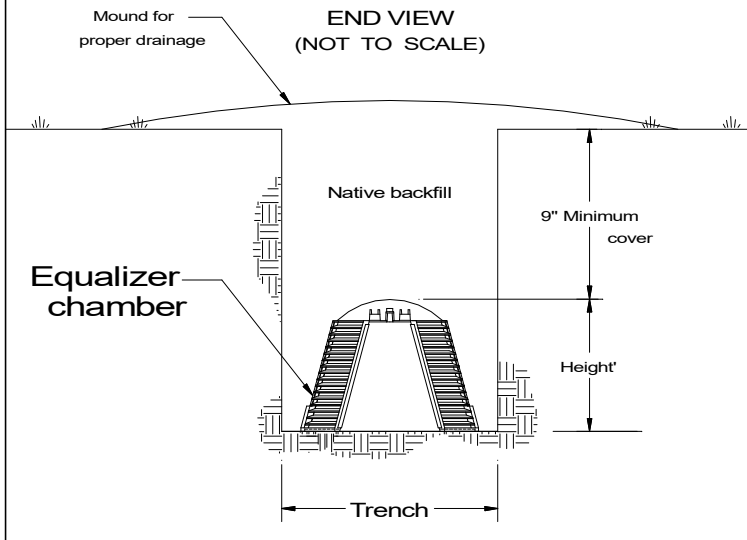

Type	Equalizer-24	Equalizer-36	High Capacity
Inventory #	INF-Quick4-24	INF-Quick5-36	INF-Quick4-HC
Length	48"	60"	48"
Width	16"	22"	34"
Height	12"	12"	16"
Capacity	20 gal	42 gal	62 gal
Weight	10 lb	16 lb	20 lb
4" Inlet Invert	6"	6"	11"
Trench	24"	24"	36"

**SPECIFICATIONS**

Construction: Polyethylene plastic  
 Equalizer 24 chambers are a direct replacement for standard 2' wide pipe and stone trench.  
 NYS Certified; check with inspector for local acceptance.

Load Rating: 16,000 lb axle w/12" cover

**POLYETHYLENE LEACHING CHAMBERS  
INFILTRATOR QUICK MODELS**

**Woodard's Concrete Products, Inc.**  
 629 Lybolt Road, Bullville, NY 10915  
 (845) 361-3471 / Fax 361-1050

Page 13D 10/10/24