


Inlet note: Use a sanitary tee with pipe extension to meet the NYSDOH requirement for baffle 16" below liquid level.

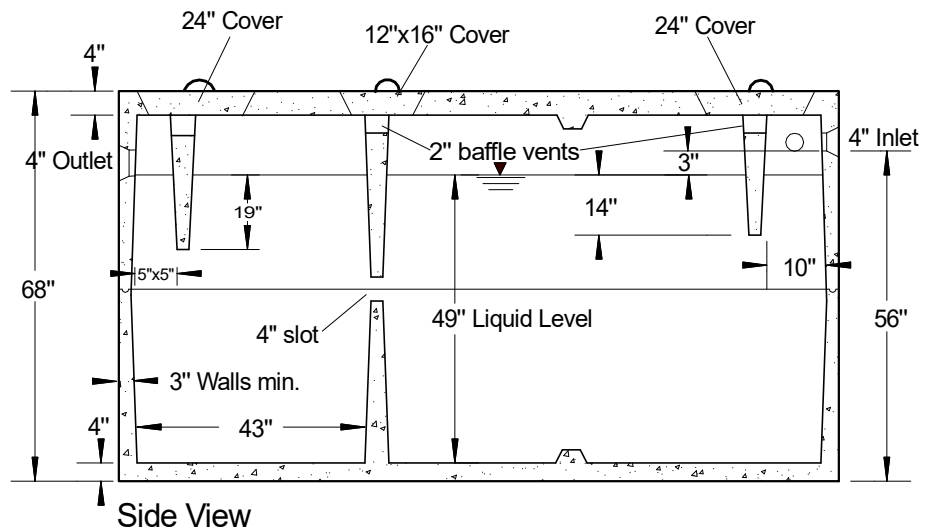

SPECIFICATIONS

Concrete Min. Strength: 4,000 psi at 28 days
 Reinforcement: #4 Rebar gr.60, 6x6x10ga. WWM
 Air Entrainment: 6%
 Construction Joint: Butyl Rubber Sealant
 Pipe Connection: Polylok Seal (patented)
 Weight = 15,500 lbs
 Load Rating: 300 psf

PRECAST SEPTIC TANKS MODEL ST-2000 / 2000 GALLONS

Woodard's Concrete Products, Inc.
 629 Lybolt Road, Bullville, NY 10915
 (845) 361-3471 / Fax 361-1050